



Gap Hog™


Gap Bloks™ & Gap Strippss™

Memory foam coating with fire retardant used for plugging leaks in a data center. Engineered product built to specific sizes requested .



Gap Fill Sheets™

Fire retardant foam capable of being cut onsite to fill many differently sized air leaks in the data center. Ordered by the sheet (54" x 60") and easily cut to size on-site.

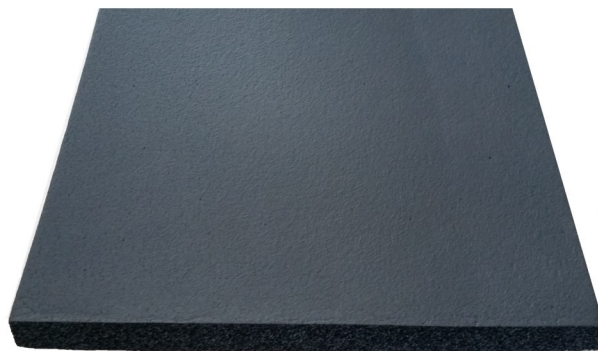

Contact Info

801.494.2098

435 W. Airport Rd Unit A5 Heber City, UT 84032

Info@theWindChill.com www.WindChillEngineering.com

Standard Specifications

Gap Blokk and Stripp	
Material	Vinyl Based
Temperature use Range	0 ° F to 200 ° F
Flammability	Listed UL 94 HBF
Block Resistance	4hr @ 160° F
Chemical Resistance	ASTM D 1308
RoHS Compliant	Yes

Gap Fill Sheets	
Material	Polymer
Temperature use Range	ASTM D 1056 -40° F to 200° F
Flammability	
FMVSS 302	UL 94
25% Compression Resistance	ASTM D 1056
UL 50 (Gaskets & Seals)	UL Listed

* Standard sheet size 1" x 54" x 60". Sheet thickness can be ordered in increments of 1" (sheets can be laminated).

